


## CUSTOMER SATISFACTION..... "Whatever it takes"

### STANDARD FEATURES:

- Up to 48" Aisle Opening
- Totally Enclosed for Safety
- PLC Controls with SMEMA Cables
- Board Edge Clearance = .100" (.060" min)
- Hand Crank Width Adjust = 2.0" – 16.0"
- 1/2" Steel Welded Frame
- Access Panel on Back
- Aisle Safety Device (End of Rail Switch)

### OPTIONS:

- 18" X 20", 21" X 24", 24" X 28" PCB Capability
- Light Tower for Indicating Operator Status
- Speed Control
- Aisle Safety Mat
- Aisle Safety Photo Eyes (3)
- Auto Width Adjust
- 32" Line Height
- Photo Eyes for SMEMA Communications
- Left Opening Aisle
- Safety Bumper Switch around Conveyor Opening

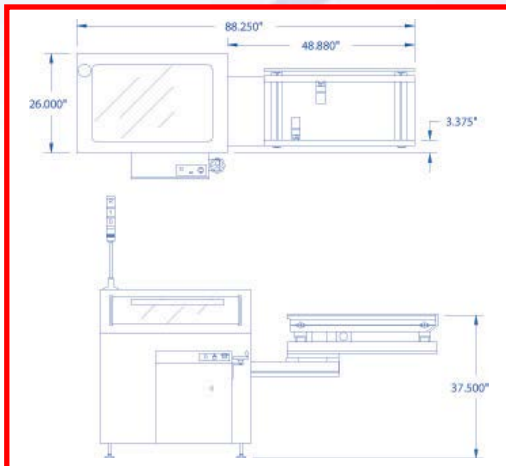

### SPECIFICATIONS:

- PCB Size: ..... Min. 2" X 4"  
..... Max. 16" X 18"
- PCB Height: ..... 37.5" +/- 2"
- Edge Clearance: ..... 3mm from edge of PCB
- Air Requirements: ..... .2 cfm @ 40 PSI
- Power Requirements: ... 15 amps @ 110VAC
- Cycle Time:**
- Unload PCB: ..... 15-19 Seconds